


DIN 1587- PN 82181

Norma

Nakrętka kołpakowa

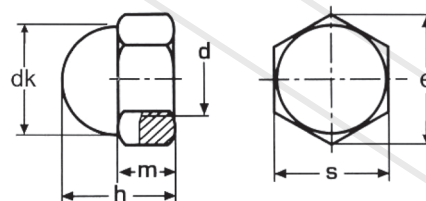

MATERIAŁY:

- Stal kl. 6, 8
- Stal nierdzewna A2, A4
- Mosiądz, Poliamid (PA6)

POKRYCIA:

- O cynk galwaniczny

RODZAJE GWINTÓW:


- Metryczne
- Metryczne drobnozwojne

d	s	e	m	h	dk
M 3	0,15	6,01	2,4	7,0	5,5
M 4	0,15	7,66	3,2	8,0	6,5
M 5	0,22	8,79	4,0	10,0	7,5
M 6	0,46	11,05	5,0	12,0	9,5
M 8	1,10	14,38	6,5	15,0	12,5
M 10	2,01	18,9	8,0	18,0	16,0
M 12	2,83	21,1	10,0	22,0	18,0
M 14	5,72	24,49	11,0	25,0	21,0
M 16	5,43	26,75	13,0	28,0	23,0
M 18	9,50	30,14	15,0	32,0	26,0
M 20	10,4	33,53	16,0	34,0	28,0
M 22	12,9	37,72	18,0	39,0	33,0
M 24	21,6	39,98	19,0	42,0	34,0
M 27	30,0	47,3	20,0	47,0	40,0
M 30	36,7	52,0	24,0	52,0	42,0

DIN 986

Norma

Nakrętka kołpakowa samozabezpieczająca z wkładką niemetalową

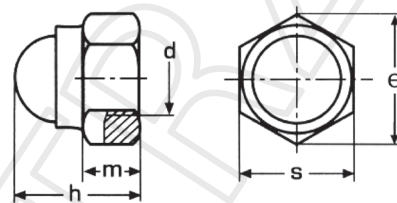

MATERIAŁY:

- Stal kl. 6, 8
- Stal nierdzewna A2

POKRYCIA:

- O cynk galwaniczny

RODZAJE GWINTÓW:

- Metryczne

d	s	e	m	h
M 4	0,14	7,66	2,9	9,6
M 5	0,16	8,79	4,4	10,5
M 6	0,33	11,05	4,9	12,0
M 8	0,53	14,38	6,44	14,0
M 10	1,07	18,9	8,04	18,1
M 12	1,90	21,1	10,37	22,5
M 14	2,68	24,49	12,1	26,4
M 16	3,71	26,75	14,1	27,5
M 20	11,1	32,95	16,9	35,5

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie