


DIN 6912

Norma

Śruba z łbem walcowym obniżonym z gniazdem sześciokątnym

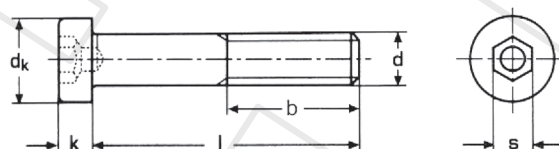

MATERIAŁY:

- Stal kl. 8.8, 10.9
- Stal nierdzewna A2, A4
- Inne

POKRYCIA:

- Bez pokrycia
- Ocynk galwaniczny biały
- Inne na zapytanie

RODZAJE GWINTÓW:

- Metryczne

| d | M3 | M4 | M5 | M6 | M8 | M10 | M12 | M14 | M16 | M20 | M24 | M30 | M36 |
|----|------|------|------|-------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
| b | 12,0 | 14,0 | 16,0 | 18,0 | 22,0 | 26,0 | 30,0 | 34,0 | 38,0 | 46,0 | 54,0 | 66,0 | 78,0 |
| s | 2,0 | 3,0 | 4,0 | 5,0 | 6,0 | 8,0 | 10,0 | 12,0 | 14,0 | 17,0 | 19,0 | 22,0 | 27,0 |
| k | 2,0 | 2,8 | 3,5 | 4,0 | 5,0 | 6,5 | 7,5 | 8,5 | 10,0 | 12,0 | 14,0 | 17,5 | 21,5 |
| dk | 5,5 | 7,0 | 8,5 | 10,0 | 13,0 | 16,0 | 18,0 | 20,67 | 23,67 | 30,0 | 36,0 | 45,0 | 54 |
| l | 4-50 | 5-60 | 6-80 | 8-120 | 10-120 | 12-120 | 16-120 | 30-100 | 20-150 | 30-220 | 40-180 | 50-160 | 60-80 |

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie