


DIN 7984-ISO 14580

Norma

Śruba z łbem walcowym obniżonym z gniazdem sześciokątnym

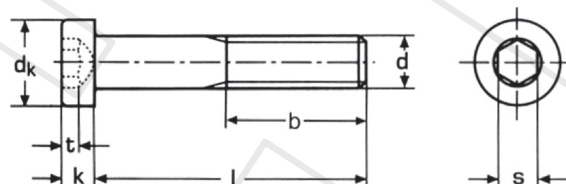

MATERIAŁY:

- Stal kl. 8.8, 10.9
- Stal nierdzewna A2, A4
- Inne

POKRYCIA:

- Bez pokrycia
- Ocynk galwaniczny biały
- Ocynk płatkowy
- Inne na zapytanie

RODZAJE GWINTÓW:

- Metryczne

d	M3	M4	M5	M6	M8	M10	M12	M16	M20
b-1<120	12,0	14,0	16,0	18,0	22,0	26,0	30,0	38,0	46,0
b-1<130	-	-	-	-	-	-	-	44,0	52,0
t	1,5	2,3	2,7	3,0	3,8	4,5	5,0	5,5	7,5
s	2,0	2,5	3,0	4,0	5,0	7,0	8,0	12,0	14,0
k	2,0	2,8	3,5	4,0	5,0	6,0	7,0	9,0	11,0
dk	5,5	7,0	8,5	10,0	13,0	16,0	18,0	24,0	30,0
l	3-50	4-60	5-80	6-120	8-120	12-120	16-120	20-150	30-150

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie