


DIN 6796

Norma

Podkładki podatne stożkowe

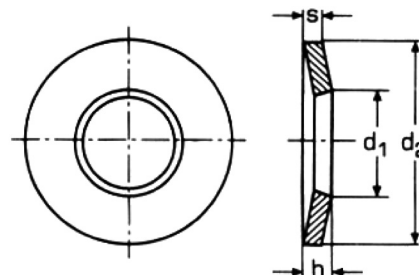

MATERIAŁY:

- Stal sprężynowa
- Stal nierdzewna A2, A4

POKRYCIA:

- Bez pokrycia
- Ocynk mechaniczny
- Ocynk Płatkowy
- Inne na zapytanie

dla gwintu	M3	M4	M5	M6	M8	M10
d1	3,2	4,3	5,3	6,4	8,4	10,5
d2	7,0	9,0	11,0	14,0	18,0	23,0
s	0,6	1,0	1,2	1,5	2,0	2,5
h max	0,85	1,3	1,55	2,0	2,6	3,2
h min	0,72	1,12	1,35	1,7	2,24	2,8

dla gwintu	M12	M14	M16	M18	M20	M22	M24
d1	13,0	15,0	17,0	19,0	21,0	23,0	25,0
d2	29,0	35,0	39,0	42,0	45,0	49,0	56,0
s	3,0	3,5	4,0	4,5	5,0	5,5	6,0
h max	3,95	4,65	5,25	5,8	6,4	7,05	7,75
h min	3,43	4,04	4,58	5,08	5,6	6,15	6,77

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie