



Tulejki dystansowe

Threaded Spacers | Abstandsbolzen

SW 6 * SW 8

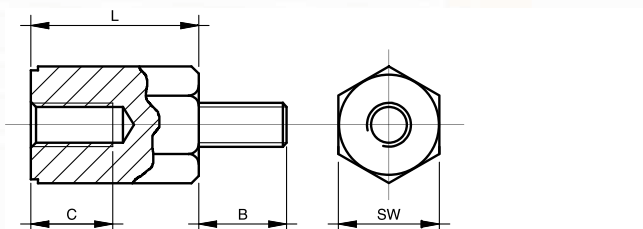

Kod Code Artikel-Nr.	SW	(mm)			Gwint Thread Gewinde
		L	B	C min.	
MZ 308 K	6	8	8	6	M 3
MZ 310 K	6	10	8	8	M 3
MZ 312 K	6	12	8	10	M 3
MZ 315 K	6	15	8	10	M 3
MZ 318 K	6	18	8	10	M 3
MZ 320 K	6	20	8	10	M 3
MZ 325 K	6	25	8	10	M 3
MZ 330 K	6	30	8	10	M 3
MZ 335 K	6	35	8	10	M 3
MZ 340 K	6	40	8	10	M 3
MZ 345 K	6	45	8	10	M 3
MZ 350 K	6	50	8	10	M 3
MZ 408 K	8	8	8	6	M 4
MZ 410 K	8	10	8	8	M 4
MZ 412 K	8	12	8	10	M 4
MZ 415 K	8	15	8	10	M 4
MZ 418 K	8	18	8	10	M 4
MZ 420 K	8	20	8	10	M 4
MZ 425 K	8	25	8	10	M 4
MZ 430 K	8	30	8	10	M 4
MZ 435 K	8	35	8	10	M 4
MZ 440 K	8	40	8	10	M 4
MZ 445 K	8	45	8	10	M 4
MZ 450 K	8	50	8	10	M 4

Materiał: Poliamid (odporny na temp. do 110°C)

Material: Polyamide (temp. resistant up to approx 110°C)

Werkstoff: Polyamid (temperaturbeständig bis ca. 110°C)

Powierzchnia: Czarna

Surface: black

Oberfläche: Schwarz



HS TECHNIK, Złotniki 18a, 59-223 Krotoszyce
tel. (+48) 663 73 63 63, tel. (+48) 76 745 44 14
e-mail: biuro@hs-technik.com.pl, www.hs-technik.com.pl