



Tulejki dystansowe

Threaded Spacers | Abstandsbolzen

SW 5,5 * SW 6

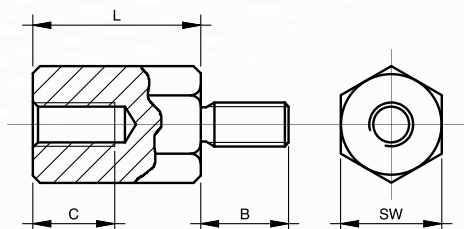

Kod Code Artikel-Nr.	SW	(mm)			Gwint Thread Gewinde
		L	B	C min.	
MZ 305/5,5ST	5,5	5	6	2,5	M 3
MZ 306/5,5ST	5,5	6	6	3	M 3
MZ 308/5,5ST	5,5	8	6	5	M 3
MZ 310/5,5ST	5,5	10	6	6	M 3
MZ 312/5,5ST	5,5	12	6	6	M 3
MZ 315/5,5ST	5,5	15	6	6	M 3
MZ 318/5,5ST	5,5	18	6	6	M 3
MZ 320/5,5ST	5,5	20	6	6	M 3
MZ 325/5,5ST	5,5	25	6	6	M 3
MZ 330/5,5ST	5,5	30	6	6	M 3
MZ 335/5,5ST	5,5	35	6	6	M 3
MZ 340/5,5ST	5,5	40	6	6	M 3

MZ 308	6	8	6	5	M 3
MZ 310	6	10	6	6	M 3
MZ 312	6	12	6	6	M 3
MZ 315	6	15	6	6	M 3
MZ 317	6	17	6	6	M 3
MZ 318	6	18	6	6	M 3
MZ 320	6	20	6	6	M 3
MZ 325	6	25	6	6	M 3
MZ 330	6	30	6	6	M 3
MZ 335	6	35	6	6	M 3
MZ 340	6	40	6	6	M 3
MZ 345	6	45	6	6	M 3
MZ 350	6	50	6	6	M 3

Materiał: Stal Automatowa (9SMnPb28K)

Material: Steel (9SMnPb28K)

Werkstoff: Automaten-Stahl (9SMnPb28K)

Powierzchnia: O cynk galwaniczny

Surface: Zinc plated

Oberfläche: Glanzverzinkt





HS TECHNIK, Złotniki 18a, 59-223 Krotoszyce
tel. (+48) 663 73 63 63, tel. (+48) 76 745 44 14
e-mail: biuro@hs-technik.com.pl, www.hs-technik.com.pl

Tulejki dystansowe

Threaded Spacers | Abstandsbolzen

SW 7 * SW 8

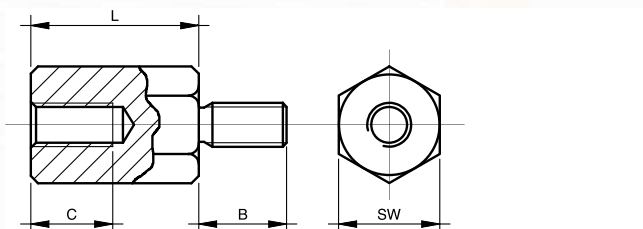

Kod Code Artikel-Nr.	SW	(mm)			Gwint Thread Gewinde
		L	B	C min.	
MZ 408/7ST	7	8	8	5	M 4
MZ 410/7ST	7	10	8	6	M 4
MZ 412/7ST	7	12	8	8	M 4
MZ 415/7ST	7	15	8	8	M 4
MZ 418/7ST	7	18	8	8	M 4
MZ 420/7ST	7	20	8	8	M 4
MZ 425/7ST	7	25	8	8	M 4
MZ 430/7ST	7	30	8	8	M 4
MZ 435/7ST	7	35	8	8	M 4
MZ 440/7ST	7	40	8	8	M 4

MZ 408	8	8	8	5	M 4
MZ 410	8	10	8	6	M 4
MZ 412	8	12	8	8	M 4
MZ 415	8	15	8	8	M 4
MZ 418	8	18	8	8	M 4
MZ 420	8	20	8	8	M 4
MZ 425	8	25	8	8	M 4
MZ 427	8	27	8	8	M 4
MZ 430	8	30	8	8	M 4
MZ 435	8	35	8	8	M 4
MZ 440	8	40	8	8	M 4
MZ 445	8	45	8	8	M 4
MZ 450	8	50	8	8	M 4
MZ 460	8	60	8	8	M 4
MZ 470	8	70	8	8	M 4
MZ 480	8	80	8	8	M 4
MZ 490	8	90	8	8	M 4
MZ 4100	8	100	8	8	M 4

Materiał: Stal Automatawa (9SMnPb28K)

Material: Steel (9SMnPb28K)

Werkstoff: Automaten-Stahl (9SMnPb28K)

Powierzchnia: Ocynk galwaniczny

Surface: Zinc plated

Oberfläche: Glanzverzinkt





HS TECHNIK, Złotniki 18a, 59-223 Krotoszyce
tel. (+48) 663 73 63 63, tel. (+48) 76 745 44 14
e-mail: biuro@hs-technik.com.pl, www.hs-technik.com.pl

Tulejki dystansowe

Threaded Spacers | Abstandsbolzen

SW 8 * SW 10

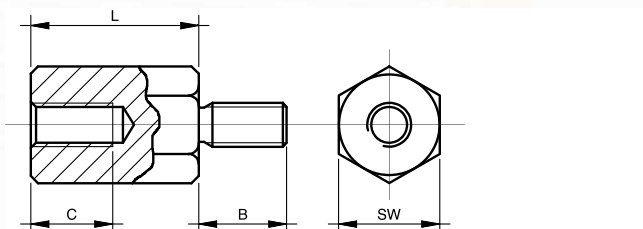

Kod Code Artikel-Nr.	SW	(mm)			Gwint Thread Gewinde
		L	B	C min.	
MZ 510/8	8	10	10	6	M 5
MZ 512/8	8	12	10	8	M 5
MZ 515/8	8	15	10	10	M 5
MZ 518/8	8	18	10	10	M 5
MZ 520/8	8	20	10	10	M 5
MZ 525/8	8	25	10	10	M 5
MZ 530/8	8	30	10	10	M 5
MZ 535/8	8	35	10	10	M 5
MZ 540/8	8	40	10	10	M 5
MZ 545/8	8	45	10	10	M 5
MZ 550/8	8	50	10	10	M 5
MZ 515	10	15	10	10	M 5
MZ 518	10	18	10	10	M 5
MZ 520	10	20	10	10	M 5
MZ 525	10	25	10	10	M 5
MZ 530	10	30	10	10	M 5
MZ 535	10	35	10	10	M 5
MZ 540	10	40	10	10	M 5
MZ 545	10	45	10	10	M 5
MZ 550	10	50	10	10	M 5
MZ 560	10	60	10	10	M 5
MZ 5100	10	100	10	10	M 5

Materiał: Stal Automatowa (9SMnPb28K)

Material: Steel (9SMnPb28K)

Werkstoff: Automaten-Stahl (9SMnPb28K)

Powierzchnia: O cynk galwaniczny

Surface: Zinc plated

Oberfläche: Glanzverzinkt





HS TECHNIK, Złotniki 18a, 59-223 Krotoszyce
tel. (+48) 663 73 63 63, tel. (+48) 76 745 44 14
e-mail: biuro@hs-technik.com.pl, www.hs-technik.com.pl

Tulejki dystansowe

Threaded Spacers | Abstandsbolzen

SW 10 * SW 13

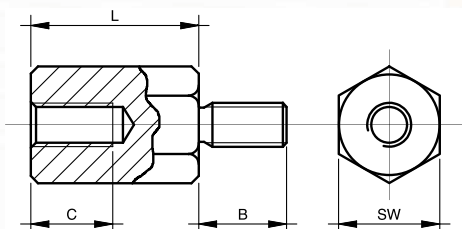

Kod Code Artikel-Nr.	SW	(mm)			Gwint Thread Gewinde
		L	B	C min.	
MZ 615	10	15	12	10	M 6
MZ 618	10	18	12	12	M 6
MZ 620	10	20	12	12	M 6
MZ 625	10	25	12	12	M 6
MZ 630	10	30	12	12	M 6
MZ 635	10	35	12	12	M 6
MZ 640	10	40	12	12	M 6
MZ 645	10	45	12	12	M 6
MZ 650	10	50	12	12	M 6
MZ 660	10	60	12	12	M 6
MZ 670	10	70	12	12	M 6
MZ 815	13	15	14	10	M 8
MZ 818	13	18	14	12	M 8
MZ 820	13	20	14	15	M 8
MZ 825	13	25	14	15	M 8
MZ 830	13	30	14	15	M 8
MZ 840	13	40	14	15	M 8
MZ 850	13	50	14	15	M 8

Materiał: Stal Automatowa (9SMnPb28K)

Material: Steel (9SMnPb28K)

Werkstoff: Automaten-Stahl (9SMnPb28K)

Powierzchnia: O cynk galwaniczny

Surface: Zinc plated

Oberfläche: Glanzverzinkt



HS TECHNIK, Złotniki 18a, 59-223 Krotoszyce
tel. (+48) 663 73 63 63, tel. (+48) 76 745 44 14
e-mail: biuro@hs-technik.com.pl, www.hs-technik.com.pl