


Nitotrzpień HNT ZI – stal ocynkowana, kołnierz płaski, gładki trzon

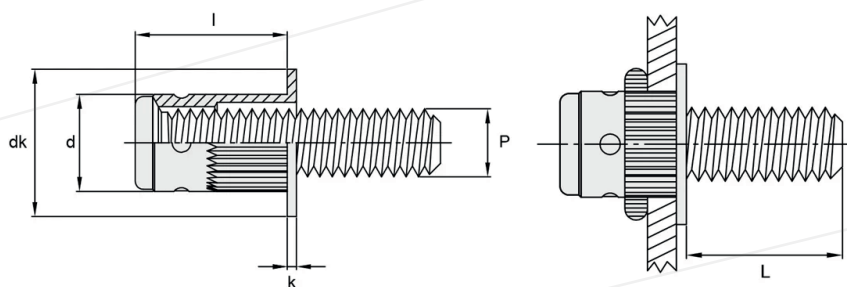

MATERIAŁY:

- stal ocynkowana

Wymiary

Gwint	d [mm]	l [mm]	L [mm]	 min-max	 Ø	dk [mm]	k [mm]			kod
M4	8,0	8,0	10,0	0,5 – 2,0 mm	5,5 mm	8,0	0,6	3,0 Nm	4000 N	HN89042010ZIG
M4	8,0	8,0	15,0	0,5 – 2,0 mm	5,5 mm	8,0	0,6	3,0 Nm	4000 N	HN89042015ZIG
M4	9,0	9,0	10,0	2,0 – 3,0 mm	5,5 mm	8,0	0,6	3,0 Nm	4000 N	HNB9043010ZIG
M4	9,0	9,0	15,0	2,0 – 3,0 mm	5,5 mm	8,0	0,6	3,0 Nm	4000 N	HN89043015ZIG
M5	6,6	9,0	10,0	0,5 – 2,0 mm	6,6 mm	9,0	0,8	6,0 Nm	8000 N	HN89052010ZIG
M5	6,5	9,0	15,0	0,5 – 2,0 mm	6,6 mm	9,0	0,8	6,0 Nm	8000 N	HN89052015ZIG
M5	6,5	10,5	10,0	2,0 – 3,5 mm	6,6 mm	9,0	0,8	6,0 Nm	8000 N	HN89053510ZIG
M5	6,5	10,5	15,0	2,0 – 3,5 mm	6,6 mm	9,0	0,8	6,0 Nm	8000 N	HN89053515ZIG
M6	7,7	10,0	10,0	0,5 – 2,5 mm	1,0 mm	10,0	1,0	10,0 Nm	11000 N	HN89062510ZIG
M6	7,7	10,0	15,0	0,5 – 2,5 mm	1,0 mm	10,0	1,0	10,0 Nm	11000 N	HN89062515ZIG
M6	7,7	11,5	10,0	2,5 – 4,0 mm	1,0 mm	10,0	1,0	10,0 Nm	11000 N	HN89064010ZIG
M6	7,7	11,5	15,0	2,5 – 4,0 mm	1,0 mm	10,0	1,0	10,0 Nm	11000 N	HN89064015ZIG
M8	9,8	12,5	15,0	1,0 – 3,0 mm	9,9 mm	12,0	1,5	24,0 Nm	21000 N	HN89083015ZIG
M8	9,8	12,5	20,0	1,0 – 3,0 mm	9,9 mm	12,0	1,5	24,0 Nm	21000 N	HN89083020ZIG
M8	9,8	14,5	15,0	3,0 – 5,0 mm	9,9 mm	12,0	1,5	24,0 Nm	21000 N	HN89085015ZIG
M8	9,8	14,5	20,0	3,0 – 5,0 mm	9,9 mm	12,0	1,5	24,0 Nm	21000 N	HN89085020ZIG