


Nitotrzpień HNT ZI – stal ocynkowana, kołnierz płaski, gładki trzon

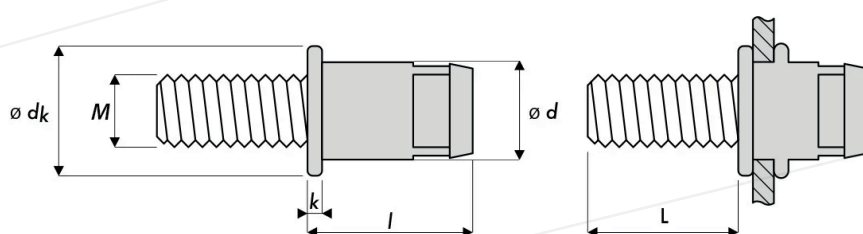

MATERIAŁY:

- stal ocynkowana

Wymiary

Gwint	d [mm]	l [mm]	L [mm]	 min-max	 Ø	dk [mm]	k [mm]			kod
M5	6,9	12,00	20,0	0,5-3,0	7,0-7,1	10,0	1,0	7,0 Nm	7000 N	HN89053020ZI
M5	6,9	12,00	30,00	0,5-3,0	7,0-7,1	10,0	1,0	7,0 Nm	7000 N	HN89053030ZI
M6	8,9	14,50	20,0	0,5-3,0	9,0-9,1	13,0	1,5	10,0 Nm	10000 N	HN89063020ZI
M6	8,9	14,50	30,00	0,5-3,0	9,0-9,1	13,0	1,5	10,0 Nm	10000 N	HN89063030ZI
M8	10,9	15,50	20,0	0,5-3,0	11,0- 11,1	16,0	1,5	30,0 Nm	21000 N	HN89082030ZI
M8	10,9	15,50	30,00	0,5-3,0	11,0- 11,1	16,0	1,5	30,0 Nm	21000 N	HN89083030ZI