


Podkładka kontaktowa podstawowa NFE 25-511 typ M

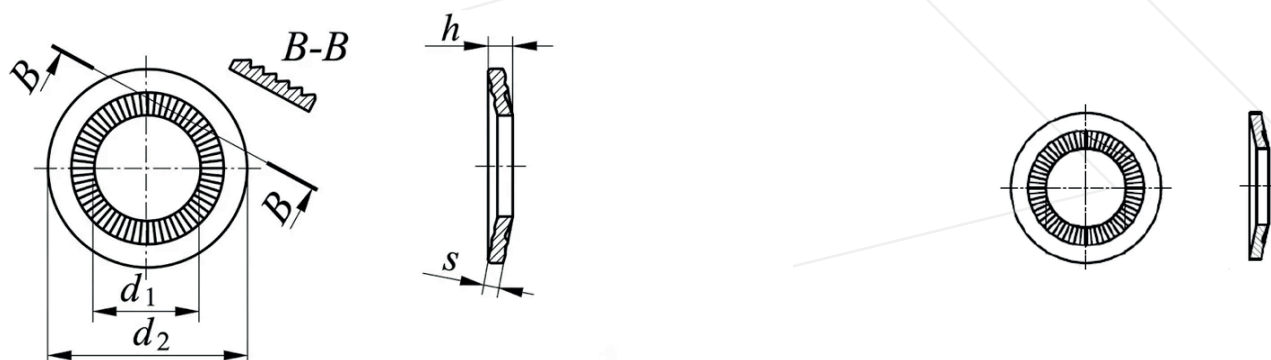

MATERIAŁY:

- stal sprężynowa
- stal nierdzewna A2

POWŁOKA:

- ocynk płatkowy fLZn

Wymiary

Średnica	d _{1min.}	d _{1max.}	d _{2min.}	d _{2max.}	s _{min.}	s _{max.}	h _{min.}	h _{max.}
M3	3.10	3.35	7.71	8.29	0.57	0.63	0.80	1
M4	4.10	4.40	9.71	10.29	0.86	0.94	1.15	1.40
M5	5.10	5.40	11.65	12.35	1.06	1.14	1.45	1.80
M6	6.10	6.40	13.65	14.35	1.26	1.34	1.75	2.10
M8	8.20	8.56	17.65	18.35	1.36	1.44	1.90	2.35

Średnica	d _{1min.}	d _{1max.}	d _{2min.}	d _{2max.}	s _{min.}	s _{max.}	h _{min.}	h _{max.}
M10	10.20	10.56	21.58	22.42	1.55	1.65	2.25	2.75
M12	12.40	12.83	26.58	27.42	1.75	1.85	2.60	3.10
M14	14.40	14.83	29.58	30.42	2.34	2.46	3.20	3.70
M16	16.40	16.83	31.50	32.50	2.74	2.86	3.60	4.10
M20	20.50	21.02	39.50	40.50	3.14	3.26	4.30	4.90