


Podkładka kontaktowa z pikotami NFE 25-511

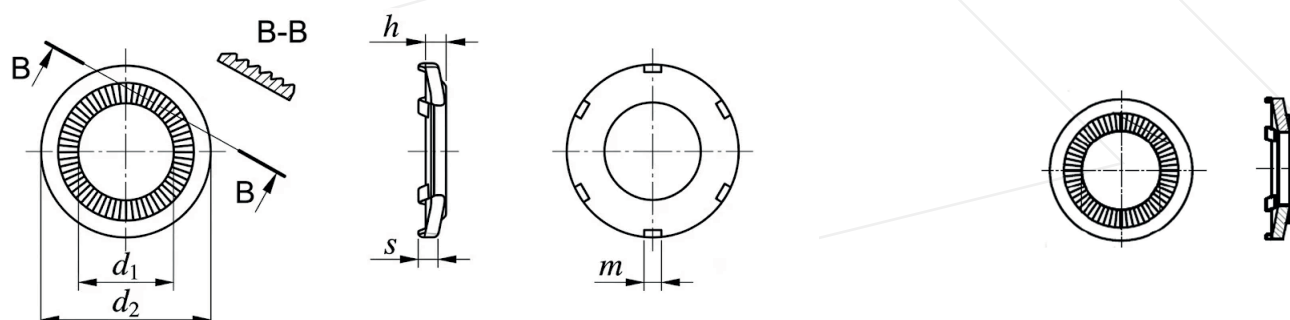

MATERIAŁY:

- stal sprężynowa

POWŁOKA:

- ocynk płatkowy fLZn

Wymiary

Średnica	d _{1min.}	d _{1max.}	d _{2min.}	d _{2max.}	s _{min.}	s _{max.}	h _{min.}	h _{max.}	m _{min.}	m _{max.}	Il. pikotów
M3	3.10	3.35	5.80	6.20	0.57	0.63	0.80	0.95	0.7	0.9	6
M4	4.10	4.40	7.80	8.20	0.77	0.83	1	1.15	0.9	1.1	6
M5	5.10	5.40	9.80	10.20	0.97	1.03	1.25	1.50	1.8	2.2	6
M6	6.10	6.40	11.80	12.20	1.16	1.24	1.50	1.80	1.8	2.2	6
M8	8.20	8.56	15.80	16.20	1.36	1.44	1.95	2.40	1.8	2.2	6

Średnica	d _{1min.}	d _{1max.}	d _{2min.}	d _{2max.}	s _{min.}	s _{max.}	h _{min.}	h _{max.}	m _{min.}	m _{max.}	Il. pikotów
M10	10.20	10.56	19.75	20.25	1.56	1.64	2.15	2.60	1.8	2.2	6
M12	12.40	12.83	23.75	24.25	1.56	1.64	2.15	2.60	1.8	2.2	6
M14	14.40	14.83	23.75	24.25	1.56	1.64	2.05	2.50	1.8	2.2	6
M16	16.40	16.83	31.70	32.30	2.44	2.56	3.50	3.95	4.3	4.7	6
M20	20.50	21.02	39.70	40.30	2.94	3.06	4.20	4.65	4.3	4.7	6