


DIN 7991 - ISO 10642

Norma

Śruba z łbem stożkowym z gniazdem sześciokątnym

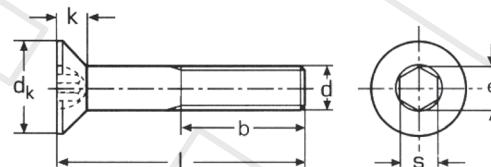

MATERIAŁY:

- Stal kl. 8.8, 10.9
- Stal nierdzewna A2, A4
- Aluminium
- Inne

POKRYCIA:

- Bez pokrycia
- Ocynk galwaniczny biały
- Ocynk płatkowy
- Inne na zapytanie

RODZAJE GWINTÓW:

- Metryczne

d	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24
b-1<120	12,0	14,0	16,0	18,0	22,0	26,0	30,0	38,0	46,0	54,0
b-1<130	-	-	-	-	28,0	32,0	36,0	44,0	52,0	60,0
e	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43	13,72	16,0
s	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0
k	1,7	2,3	2,8	3,3	4,4	5,5	6,5	7,5	8,5	14,0
dk	6,0	8,0	10,0	12,0	16,0	20,0	24,0	30,0	36,0	39,0
l	4-50	5-60	6-80	8-150	10-200	12-200	16-200	16-200	30-200	40-150

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie