


DIN 935 - ISO 7035 - PN 82148

Norma

Nakrętka koronowa

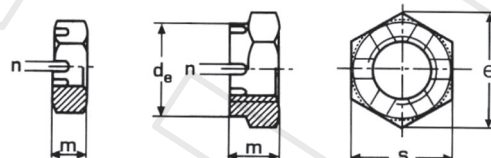

MATERIAŁY:

- Stal kl. 8, 10
- Stal nierdzewna A2, A4

POKRYCIA:

- O cynk galwaniczny
- O cynk płatkowy
- O cynk ogniowy
- Inne na zapytanie

RODZAJE GWINTÓW:

- Metryczne
- Metryczne drobnozwojne

d	s	e	m	n	de
M 5	8,0	8,79	6,0	1,4	-
M 6	10,0	11,05	7,5	2,0	-
M 8	13,0	14,38	9,5	2,5	-
M 10	17,0	18,90	12,0	2,8	-
M 12	19,0	21,10	15,0	3,5	15,57
M 14	22,0	24,49	16,0	3,5	17,57
M 16	24,0	26,75	19,0	4,5	21,48
M 18	27,0	29,56	21,0	4,5	24,3
M 20	30,0	32,95	22,0	4,5	27,3
M 22	34,0	37,29	26,0	5,5	29,3
M 24	36	39,55	27	5,5	34
M 27	41	45,20	30	5,5	38
M 30	46	50,85	33	7	42
M 33	50	55,37	35	7	46
M 36	55	60,79	38	7	50
M 39	60	66,44	40	7	55
M 42	65	71,30	46	9	58
M 45	70	76,95	48	9	62
M 48	75	82,60	50	9	65

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie