


DIN 931 - ISO 4014 - PN 82101

Norma

Śruba z łbem sześciokątnym

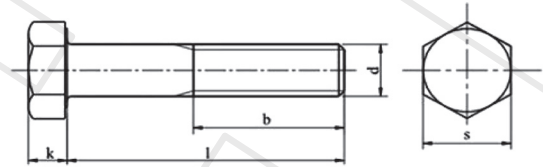

MATERIAŁY:

- Stal kl. 5.6, 5.8, 8.8, 10.9, 12.9
- Stal nierdzewna A2, A4
- Mosiądz, Aluminium
- Poliamid, Inne

POKRYCIA:

- Bez pokrycia
- Ocynk galwaniczny biały
- Ocynk płatkowy
- Ocynk ogniowy
- Inne np. Cynk-Nikiel

RODZAJE GWINTÓW:

- Metryczne
- Izometryczne
- Calowe

d	M3	M4	M5	M6	(M7)	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24
1 ≤ 125	12	14	16	18	20	22	26	30	34	38	42	46	50	54
b min 125 < 1 ≤ 200	-	-	22	24	26	28	32	36	40	44	48	52	56	60
1 > 200	-	-	-	-	-	-	45	49	53	57	61	65	69	73
k	2	2,8	3,5	4	4,8	5,3	6,4	7,5	8,8	10	11,5	12,5	14	15
s	5,5	7	8	10	11	13	16/17	18/19	21/22	24	27	30	32/34	36
l	30-40	25-100	25-130	6-200	30-80	35-300	35-400	40-500	50-320	50-500	55-320	60-500	70-300	70-640

d	(M27)	M30	(M33)	M36	(M39)	M42	M45	M48	(M52)	M56	(M60)	M64	(M68)	M72
1 ≤ 125	60	66	72	78	84	90	96	102	-	-	-	-	-	-
b min 125 < 1 ≤ 200	66	72	78	84	90	96	102	108	116	124	132	140	148	156
1 > 200	79	85	91	97	103	109	115	151	129	137	145	153	161	169
k	17	18,7	21	22,5	25	26	28	30	33	35	38	40	43	45
s	41	46	50	55	60	65	70	75	80	85	90	95	100	105
l	75-560	90-600	90-400	100-580	110-400	120-500	120-360	130-500	150-500	130-440	170-500	180-500	180-500	190-500

* Wymiary w tabeli to wymiary standardowe

** Inne na zapytanie